




- (51) International Patent Classification:  
*H04R 1/06* (2006.01)
- (21) International Application Number:  
PCT/US2015/037585
- (22) International Filing Date:  
25 June 2015 (25.06.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/021,160 6 July 2014 (06.07.2014) US  
14/632,304 26 February 2015 (26.02.2015) US
- (71) Applicant: **DYNAMOUNT, LLC** [US/US]; 5550 Gene-see Ct. E, Apt. 213, San Diego, CA 92111 (US).
- (72) Inventors: **RUSSO, Jonathan**; 2600 Torrey Pines Rd., A15, La Jolla, CA 92037 (US). **RUSSO, Michael**; 5550 Genesse Ct. E., Apt. 213, San Diego, CA 92111 (US).
- (74) Agent: **RAMSEY, Christopher**; GrayRobinson, P.A., 301 East Pine Street, Suite 1400, P.O. Box 3068, Orlando, FL 32801 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report (Art. 21(3))

(54) Title: SYSTEMS AND METHODS FOR A ROBOTIC MOUNT

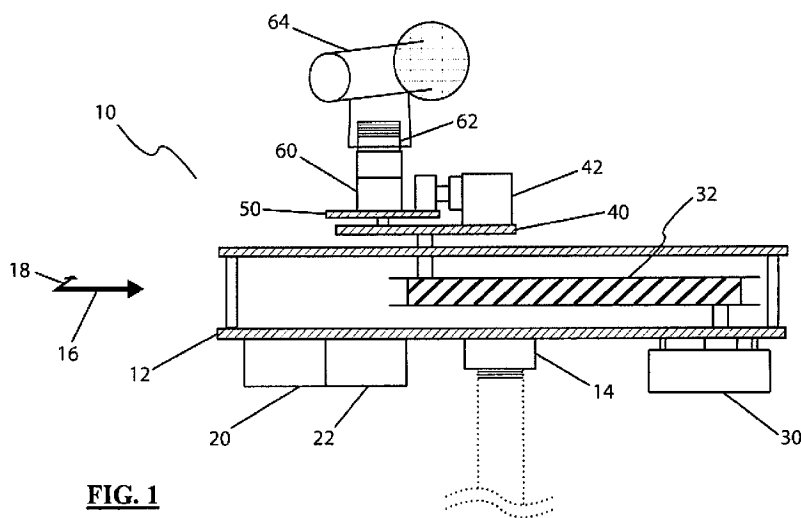

**FIG. 1**

(57) Abstract: A robotic mount is disclosed that attaches onto any appropriate stand, framework, or other support structure. The mount can manipulate the position and orientation of affixed devices upon remote command received from any network connected device. A specific or sequence of positions/orientations can be precisely registered and promptly returned to on command.

WO 2016/007301 A1

## **Systems and Methods for a Robotic Mount**

### **Cross-Reference to Related Applications**

[0001] This application claims the benefit of U.S. Application No. 14/632,304, filed February 26, 2015, which claims the benefit of U.S. Provisional Application No. 62/021,160, filed July 6, 2014. Both are hereby incorporated by reference in their entireties.

### **Field of the Invention**

[0002] The embodiments described herein relate generally to the technical field of network connected robotics. More particularly, the present invention relates to controllable hardware mounts.

### **Background of the Invention**

[0003] In certain applications, particularly in connection with audio/video engineering and photography, an ability to remotely manipulate the position and orientation of employed hardware is desirable. Additionally, an ability to register a specific or sequence of positions/orientations to be returned to on remote command is also desirable. For example, when positioning a microphone to capture sound from a loudspeaker, musical instrument, vocalist, or any other source, even a very small modification to the microphone position relative to the sound source can have a large effect on the captured audio characteristics, or tone. Audio engineers will typically test multiple microphone positions and orientations relative to the target sound source in an attempt to locate the

microphone position/orientation that produces the desired tone. Conventional microphone stands are static, as are the mounts that attach to them and support the microphone; their positions/orientations cannot be modified without physical manipulation by hand. It is not an uncommon experience to repeatedly walk between the microphone location (live room, stage, isolation booth, etc.) and the monitoring location (control room, sound board, etc.) making position modifications by hand and comparing the captured tones. Further, it is exceedingly difficult to test multiple possible microphone positions and then return to a previous position if the tone there is favored.

**[0004]** There exist remote controlled microphone stands that allow for the manipulation of the stand along various axes using a custom controller. Such devices are typically bulky and expensive since it is a significant portion of the stand itself that is being manipulated. Such devices are also limited in versatility; they function as standalone units whereas audio engineers typically employ a variety of different microphone stand types to meet dimensional and positional requirements for a wide array of audio capturing applications. Such devices are also inefficient as they typically require the use of a custom controller for remote manipulation as opposed to a controlling device already possessed by the operator.

**[0005]** Similarly, when capturing an image or video for a wide variety of applications (e.g., filmmaking, surveillance, etc.) it is often desirable to have the camera execute movements relative to the subject being photographed. For example, many surveillance cameras are mounted to remote control pan/tilt

mounts enabling them to change orientation. Such devices are limited in versatility; they only permit orientation manipulation and not position manipulation which would be useful for such applications as peeking around a corner. In another example, photographers and filmmakers will typically employ devices such as remote controlled dollies for camera motion along an axis. Such devices are typically bulky and expensive making them excessive for many applications. Such devices are also limited in versatility; they only permit position manipulation along a single axis when control in multiple dimensions is often desirable. Such devices are also inefficient as they typically require the use of a custom controller for remote manipulation as opposed to a controlling device already possessed by the operator.

### **Summary of the Invention**

**[0006]** In one embodiment, a mount system is disclosed that comprises a first movable platform having a first axis along its length; a first motor engaged to the first movable platform and configured to control sliding motion of the first movable platform along the first axis; a device coupler configured to couple the first movable platform to an attached device; a second motor encased in the device coupler and configured to enable at least one of panning and rotation of the attached device; a wireless network connection device; and a microcontroller/CPU device configured to receive control signals from the wireless network connection device and responds by activating one or more of the motors.

**[0007]** In another embodiment, a robotic mount is disclosed that comprises a first movable platform having a first axis along its length; a second motor engaged to a second movable platform and configured to slide the second movable platform along the first axis; a wireless network connection device; and a microcontroller/CPU device; wherein the microcontroller/CPU device is configured to receive control signals from the wireless network connection device and respond by activating one or more of the motors.

**[0008]** The present invention further discloses a method for remote control of one or more mounts, wherein each mount comprises a wireless network connection device, a microcontroller/CPU device, a plurality of motors and a plurality of movable platforms; the method comprising: receiving control signals from a controlling device through a wireless network connection by one or more of the wireless network connection devices; communicating the received control signals to the corresponding microcontroller/CPU device; and activating one or more of the motors to adjust one or more of the plurality of movable platforms by the corresponding microcontroller/CPU device, according to the control signals.

### **Brief Description of the Drawings**

**[0009]** For a better understanding of the embodiments and/or related implementations described herein and to show more clearly how they may be carried into effect, reference will now be made, by way of example only, to the accompanying drawings which show at least one exemplary embodiment and/or related implementation in which:

**[0010]** FIG. 1 illustrates a side view of an exemplary robotic mount of the present invention;

**[0011]** FIG. 2 illustrates a top view of the robotic mount of FIG. 1;

**[0012]** FIG. 3 illustrates a side view illustrating an exemplary embodiment of the hardware mount where an attachable control box is provided as a separate unit;

**[0013]** FIG. 4 illustrates a perspective view of another robotic mount as embodied in the present invention;

**[0014]** FIG. 5 illustrates a perspective view illustrating an exemplary application of the robotic mount of the present invention employed as a microphone stand;

**[0015]** FIG. 6 illustrates a perspective view illustrating another exemplary application of the robotic mount of the present invention employed as a video camera stand;

**[0016]** FIG. 7 illustrates a method for remotely controlling a robotic mount as embodied in the present invention; and

**[0017]** FIG. 8 illustrates a method for remotely controlling a plurality of robotic mounts.

**[0018]** It will be appreciated that for simplicity and clarity of illustration, elements shown in the figures have not necessarily been drawn to scale. For example, the dimensions of some of the elements may be exaggerated relative to other elements for clarity. Further, where considered appropriate, reference

numerals may be repeated among the figures to indicate corresponding or analogous elements.

### **Detailed Description of the Embodiments**

**[0019]** It will be appreciated that numerous specific details are set forth in order to provide a thorough understanding of the exemplary embodiments described herein.

**[0020]** However, it will be understood by those of ordinary skill in the art that the embodiments and/or implementations described herein may be practiced without these specific details. In other instances, well-known methods, procedures and components have not been described in detail so as not to obscure the embodiments and/or implementations described herein.

Furthermore, this description is not to be considered as limiting the scope of the embodiments described herein, but rather to describe the structure and operation of the various embodiments and/or implementations described herein.

**[0021]** Referring now to FIG. **1** and FIG. **2** to describe technical aspects of the invention in more detail, there is shown an exemplary embodiment in which a hardware mount **10** serves as a microphone mount having a primary framework **12** which may be connected to any microphone stand via a coupler **14**. For example, the coupler may be (but is not limited to) a threaded adapter, a fit-in housing, a tripod head, etc. Affixed to the primary framework **12** are a wireless network connection device **20**, as well as a microcontroller/CPU device **22** and a primary servomechanism (servo) **30**. The primary servo **30** drives a timing belt **32**

that is connected to a first moving platform **40**, enabling it to engage in controlled motion along a primary axis **16**. Affixed to the first moving platform **40** is a secondary servo **42** that drives the motion of a second moving platform **50** along a secondary axis **18** perpendicular to the primary axis **16**. Affixed to the second moving platform **50** is a tertiary servo **60** encased in a second coupler **62** (e.g. a threaded adapter) enabling the rotation/panning of any attached microphone **64**.

**[0022]** In further detail, still referring to the invention of FIG. **1** and FIG. **2**, the primary framework **12** may be sufficiently wide to allow for an adequate range of motion of the first moving platform **40** such that it may extend across the width of most common sound sources (such as a guitar cabinet speaker, drum head, etc.), typically 4 to 24 inches. The second moving platform **50** may be sufficiently long to allow for a similar range of motion in the axis **18** perpendicular to the primary axis **16**, typically 4 to 24 inches. The hardware mount **10** may be made of metal or of any other sufficiently rigid and strong material such as high-strength plastic, wood, and the like. Further, the various components of the hardware mount **10** can be made of different materials. The type of material used would not change the way the invention works.

**[0023]** In an exemplary embodiment, the hardware mount system **10** serves as a microphone mount and that may include a microphone cable input and output to enable the captured audio signal to be analyzed in real time by the device. This permits the automation of various position and orientation manipulation sequences while analyzing captured frequency data in processes designed to



determine the optimal microphone position/orientation for a given application, replacing manual techniques such as “shaving”.

**[0024]** Referring now to FIG. 3, there is shown another exemplary embodiment of a hardware mount system **150** that includes a separate but attachable control box **170**. The control box **170** contains both a wireless network connection device **160** and microcontroller/CPU device **162**. The control box **170** may be affixed using a fastening device **164** (e.g., clamping bracket, socket tee, bolts, suction cups, adhesive, or other means) to the shaft of the stand to which the mount is attached. Alternatively, the fastening device **164** could be used to affix the control box **170** to any other suitable framework or support structure. The microcontroller/CPU device **162** receives control signals from the wireless network connection device **160** and responds by activating one or a more servos, stepper motors, linear actuators, or other similar devices (**180-1** to **180-N**) through either electrical wire or wireless close-range communication means in order to manipulate the position and orientation of the mounted hardware.

**[0025]** Referring to FIG. 4, there is shown an alternative embodiment in which a robotic hardware mount **70** serves as a microphone mount which may be connected to any microphone stand via a threaded adapter **72**. Affixed to the threaded adapter **72** are a wireless network connection device **80**, as well as a microcontroller/CPU device **82** and a primary servo **84**. The primary servo **84** drives the first moving platform **90**, enabling it to engage in controlled rotational motion. A secondary servo **102** is affixed to a second moving platform **100**, enabling the second moving platform **100** to engage in controlled motion along

the axis **94** of the first moving platform **90**. Affixed to the second moving platform **100** is a linear actuator **104** encased in a threaded adapter onto which any standard microphone may be attached. The linear actuator **104** enables motion of the threaded adapter and the attached microphone along a direction perpendicular to the length of the first moving platform **90**.

**[0026]** In further detail, still referring to the invention of FIG. **4**, the first moving platform **90** is sufficiently long to allow for an adequate range of motion of the second moving platform **100** such that it may extend across the width of most standard sound sources (such as a guitar cabinet speaker, drum head, etc.), e.g. 4 to 24 inches. The hardware mount **70** may be made of metal or of any other sufficiently rigid and strong material such as high-strength plastic, carbon fiber, and the like. Further, the various components of the hardware mount **70** can be made of different materials. The type of material used would not change the way the invention works.

**[0027]** Referring now to FIG. **5**, there is shown an exemplary embodiment in which a hardware mount **400** serves as a microphone mount operating at an angle relative to the horizon which is similar to the angle of the sound source. In this embodiment the hardware mount **400** employs an affixed laser **410** as a means of projecting its relative position/orientation onto the sound source. Optionally, a camera may be affixed to the hardware mount **400** so that the position/orientation of the attached microphone can be observed from a remote controlling location. The laser **410** could also be used as a targeting/tracking

device or measuring device to determine the precise distance from the subject of interest.

**[0028]** Referring now to FIG. **6**, there is shown another exemplary embodiment in which a hardware mount **600** serves as a video camera mount which attaches to an appropriate support structure using a fastening device **610** (e.g., clamping bracket, socket tee, bolts, suction cups, adhesive, or other means). The fastening device **610** is affixed to a primary platform **620** which also houses a wireless network connection device **630** and microcontroller/CPU device **640**. A slider hub **650** contains a pair, trio, or combination of servos, stepper motors, linear actuators or similar devices enabling it to engage in controlled motion along a primary axis, to manipulate the position of a secondary platform **660** along a secondary axis, and to engage the secondary platform **660** in controlled rotational motion. Affixed to one end of the secondary platform **660** is a pan/tilt mechanism **670** onto which the surveillance camera is attached.

**[0029]** Referring now to FIG. **7**, there is shown a remote controlling device **210** (e.g., mobile phone, tablet, laptop computer, desktop computer, etc.) with graphical user interface that communicates through a network connection **220** with a server **230** which in turn communicates through a wireless network connection **240** with a wireless network connection device **250** affixed to a robotic hardware mount **200**. The wireless network connection device **250** communicates directly (e.g., electrical wire, PCB, etc.) with a microcontroller/CPU device **260** which is also affixed to the robotic hardware mount **200**. A remote controlling device **210** sends control signals through the

described communication chain to a microcontroller/CPU device **260** which responds to the control signals by activating one or a plurality of servos, stepper motors, linear actuators, or other similar devices (**270-1** to **270-N**) and thus manipulating the position/orientation of mounted hardware. In addition, control signals for lasers, cameras, and other devices affixed to the robotic hardware mount **200** can be sent from the remote controlling device **210** through the described communication chain to the microcontroller/CPU device **260**. The microcontroller/CPU device **260** sends data (e.g., camera footage, audio signal, etc.) from the robotic hardware mount **200** back through the communication chain to the remote controlling device **210** for viewing, analytics, or any other desired use.

**[0030]** Referring now to FIG. **8**, there is shown a remote controlling device **310** with graphical user interface that communicates through a network connection **320** with a server **330** which in turn communicates through wireless network connection **340** with a wireless network connection device **350**. The wireless network connection device **350** communicates directly with a microcontroller/CPU device **360**. Both the wireless network connection device **350** and the microcontroller/CPU device **360** are housed within a control box **370** that is external to the one or plurality of robotic hardware mounts (**300-1** to **300-N**). A remote controlling device **310** sends control signals through the described communication chain to a microcontroller/CPU device **360** which responds to the control signals by activating one or a plurality of servos, stepper motors, linear actuators, or other similar devices (**510-1** to **510-N**, **520-1** to **520-N**, etc.) housed

within the one or plurality of robotic hardware mounts (**300-1** to **300-N**) and thus independently manipulating the position/orientation of each mounted piece of hardware. In addition, control signals for lasers, cameras, and other devices affixed to the one or plurality of robotic hardware mounts (**300-1** to **300-N**) can be sent from the remote controlling device **310** through the described communication chain to the microcontroller/CPU device **360**. The microcontroller/CPU device **360** sends data (e.g., camera footage, audio signal, etc.) from the one or plurality of robotic hardware mounts (**300-1** to **300-N**) back through the communication chain to the remote controlling device **310** for viewing, analytics, or any other desired use.

**[0031]** While the above description provides examples of the embodiments, it will be appreciated that some features and/or functions of the described embodiments are susceptible to modification without departing from the spirit and principles of operation of the described embodiments. Accordingly, what has been described above has been intended to be illustrative of the invention and non-limiting and it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the invention as defined in the claims appended hereto.

**THAT WHICH IS CLAIMED IS:**

1. A mount system comprising:
  - a first movable platform having a first axis along its length;
  - a first motor engaged with the first movable platform and configured to control sliding motion of the first movable platform along the first axis;
  - a device coupler configured to couple the first movable platform to a microphone head;
  - a second motor encased in the device coupler and configured to enable at least one of panning and rotation of the microphone head;
  - a wireless network connection device; and
  - a microcontroller configured to receive control signals from the wireless network connection device and respond by activating one or more of the motors.
  
2. The mount system of claim 1, wherein the system further comprises:
  - a framework having a second axis along its length that is perpendicular to the first axis;
  - a second movable platform attached to the first movable platform;
  - and
  - a third motor engaged to the second movable platform and configured to drive the first movable platform along the second axis.
  
3. The mount system of claim 2, wherein the system further comprises a timing belt connected to the first movable platform and driven by the third motor.
  
4. The mount system of claim 2, wherein the microcontroller and the wireless network connection device are affixed to the framework.

5. The mount system of claim 2, further comprising a stand coupler configured to couple the mount to a microphone stand.

6. The mount system of claim 1, wherein the microcontroller and the wireless network connection device are in a control box, wherein the control box comprises a fastening means.

7. The mount system of claim 1, wherein the microcontroller and the wireless network connection device communicate with each other via close-range communication means.

8. The mount system of claim 1, wherein the microcontroller and the wireless network connection device communicate with each other via electrical wires.

9. The mount system of claim 1, wherein the system further comprises a cable input and a cable output to enable analysis of captured audio signals, and to automatically control position and orientation of the microphone head in real time.

10. The mount system of claim 1, wherein the system further comprises a laser source configured to align position and orientation of the mount relative to a sound source.

11. The mount system of claim 1, wherein the system further comprises a camera affixed to the mount configured to enable remote observation of the position and orientation of the microphone head.

12. The mount system of claim 1, wherein the mount is set to operate at an angle relative to the horizon similar to that of a sound source.

13. The mount system of claim 1, wherein the wireless network connection device remotely communicates with a controlling device through a wireless network connection.

14. The mount system of claim 1, wherein the motors are set to reference values when the system is turned on.

15. A mount system comprising:  
a first movable platform having a first axis along its length;  
a first motor engaged to one end of the first movable platform and configured to control rotational motion of the first movable platform about a second axis through the one end and perpendicular to the first axis;  
a second movable platform having a device coupler configured to couple to a microphone head;  
a second motor engaged to the second movable platform and configured to slide the second movable platform along the first axis;  
a wireless network connection device; and  
a microcontroller, wherein the microcontroller is configured to receive control signals from the wireless network connection device and respond by activating one or more of the motors.

16. The mount system of claim 15, wherein the mount further comprises a linear actuator, encased in a device adapter and affixed to the second platform, configured to enable linear motion of the device adapter in a direction perpendicular to the first axis.



17. The mount system of claim 15, wherein the mount further comprises a stand coupler configured to couple the mount to a microphone stand.

18. A method for remote control of one or more microphone mounts, wherein each microphone mount comprises a wireless network connection device, a microcontroller, a plurality of motors and a plurality of movable platforms; the method comprising:


receiving control signals from a controlling device through a wireless network connection by one or more of the wireless network connection devices;

communicating the received control signals to the corresponding microcontroller; and


activating one or more of the motors to adjust one or more of the plurality of movable platforms by the corresponding microcontroller, according to the control signals.

19. The method of claim 17, wherein coordinates of the plurality of moving platforms are communicated back to the controlling device through the wireless network connection.


20. The method of claim 18, wherein the coordinates of the plurality of moving platforms are stored in memory for future reset of the movable platforms.

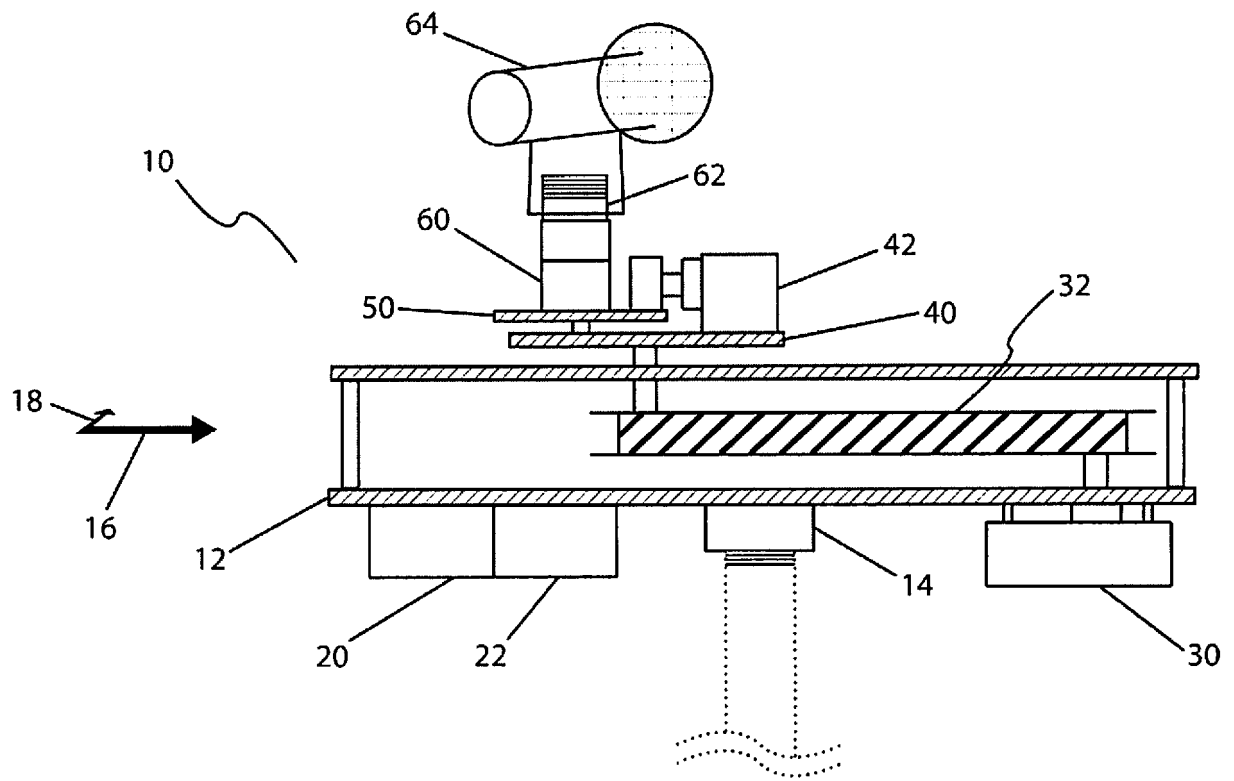


**FIG. 1**

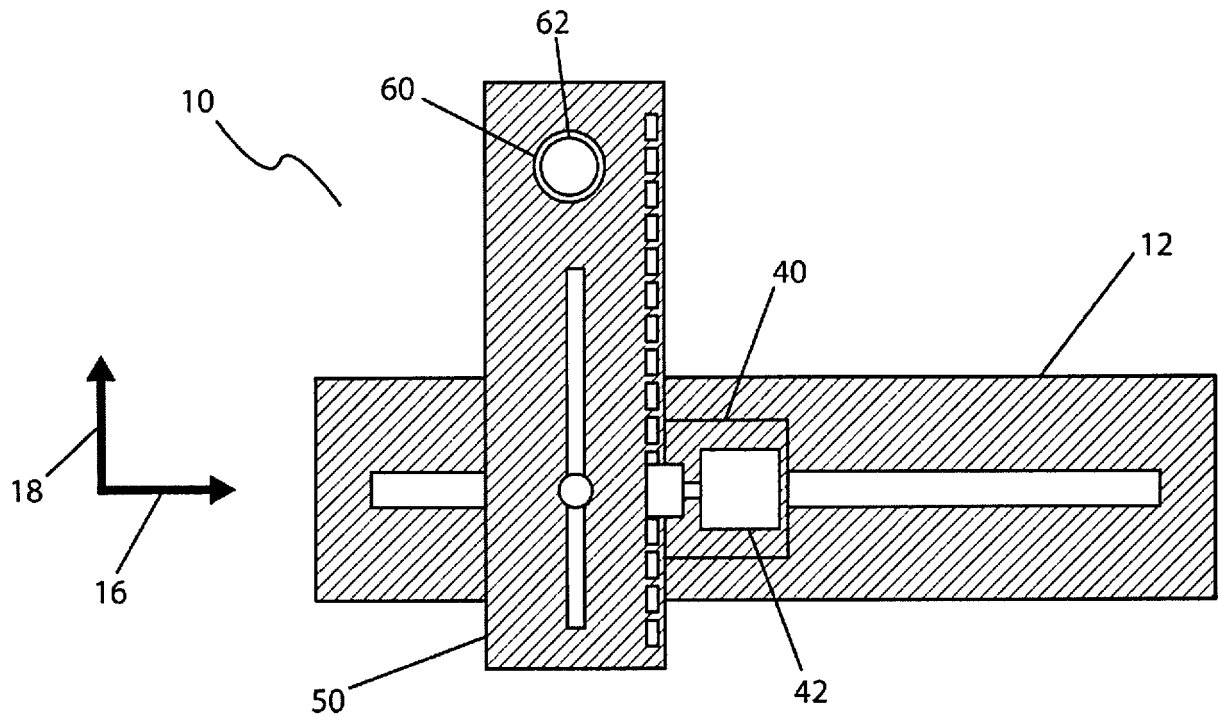


**FIG. 2**

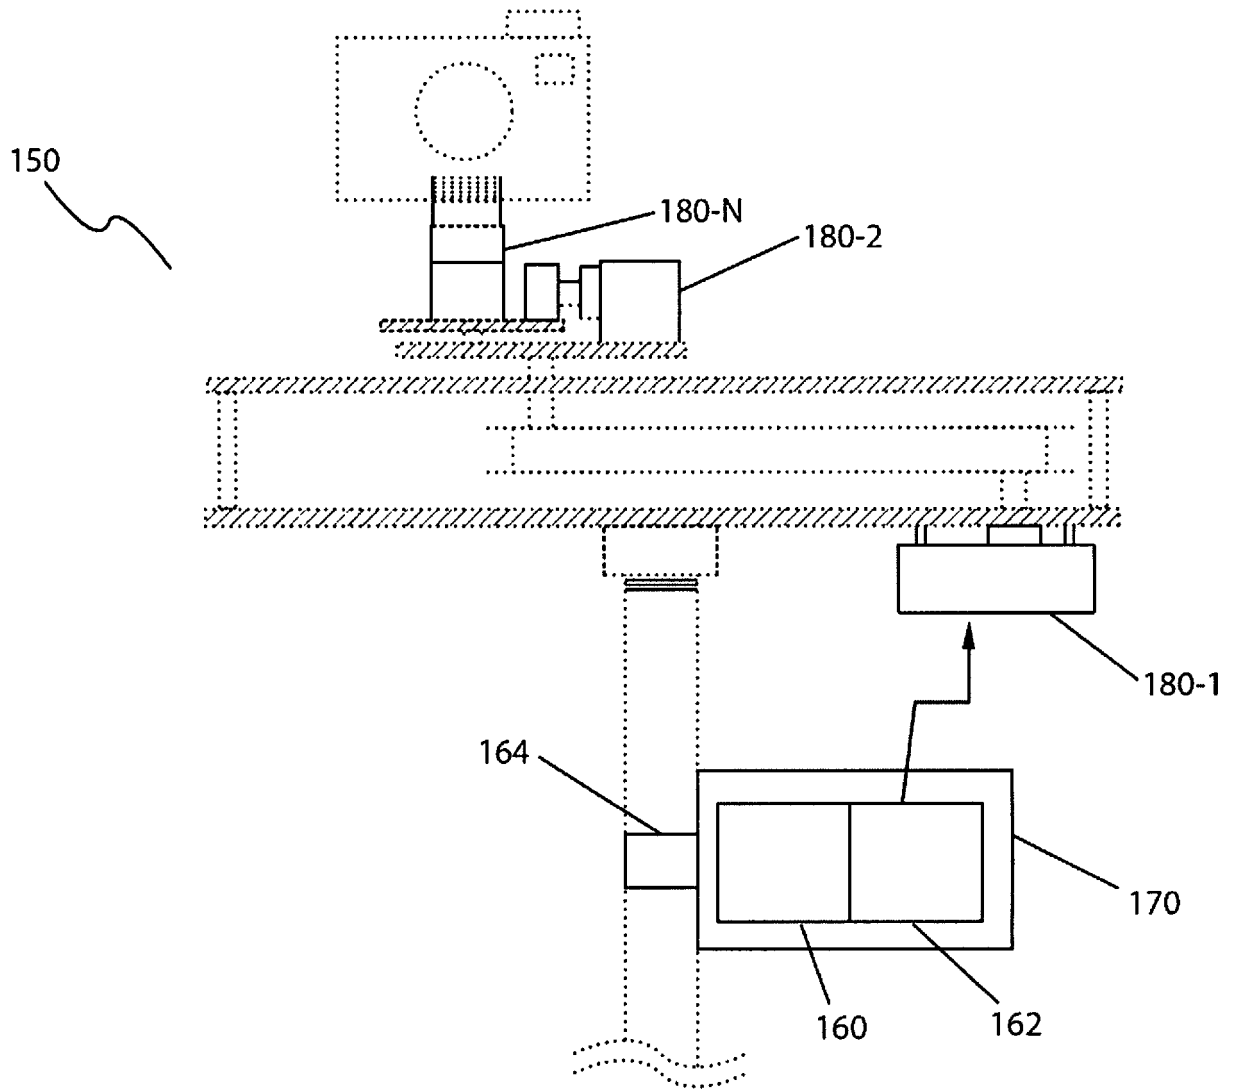


**FIG. 3**

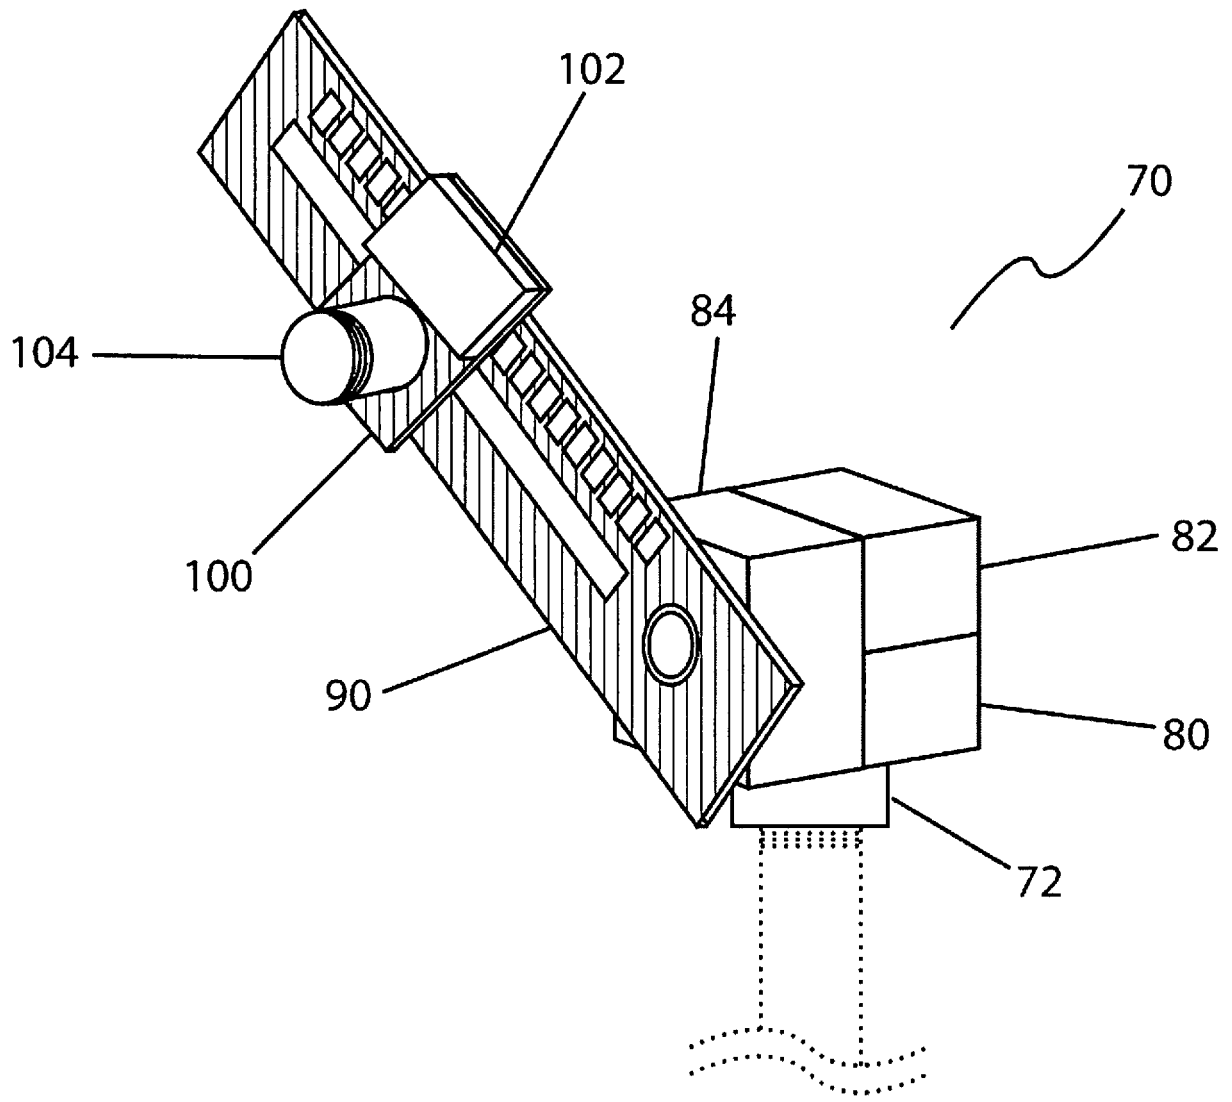


**FIG. 4**

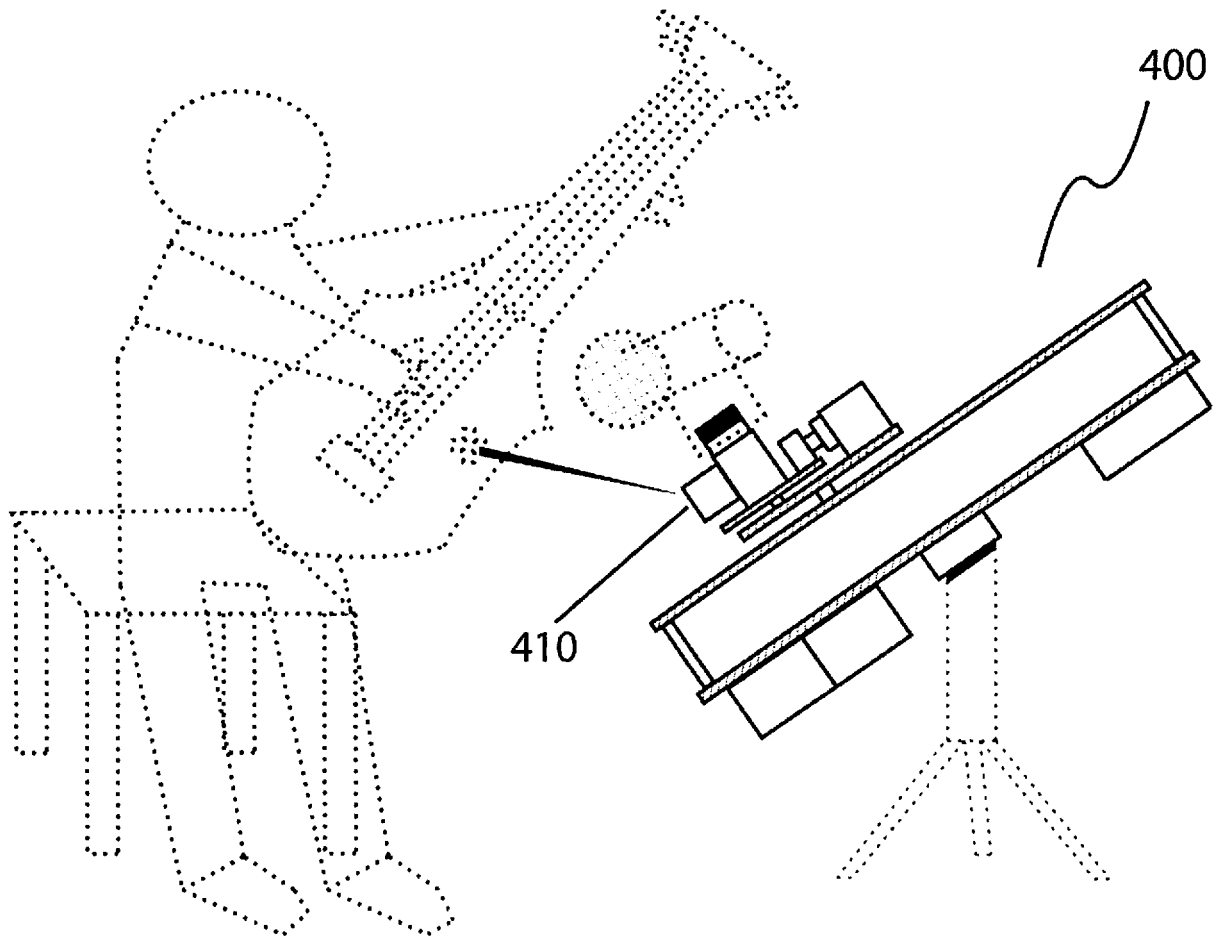

**FIG. 5**

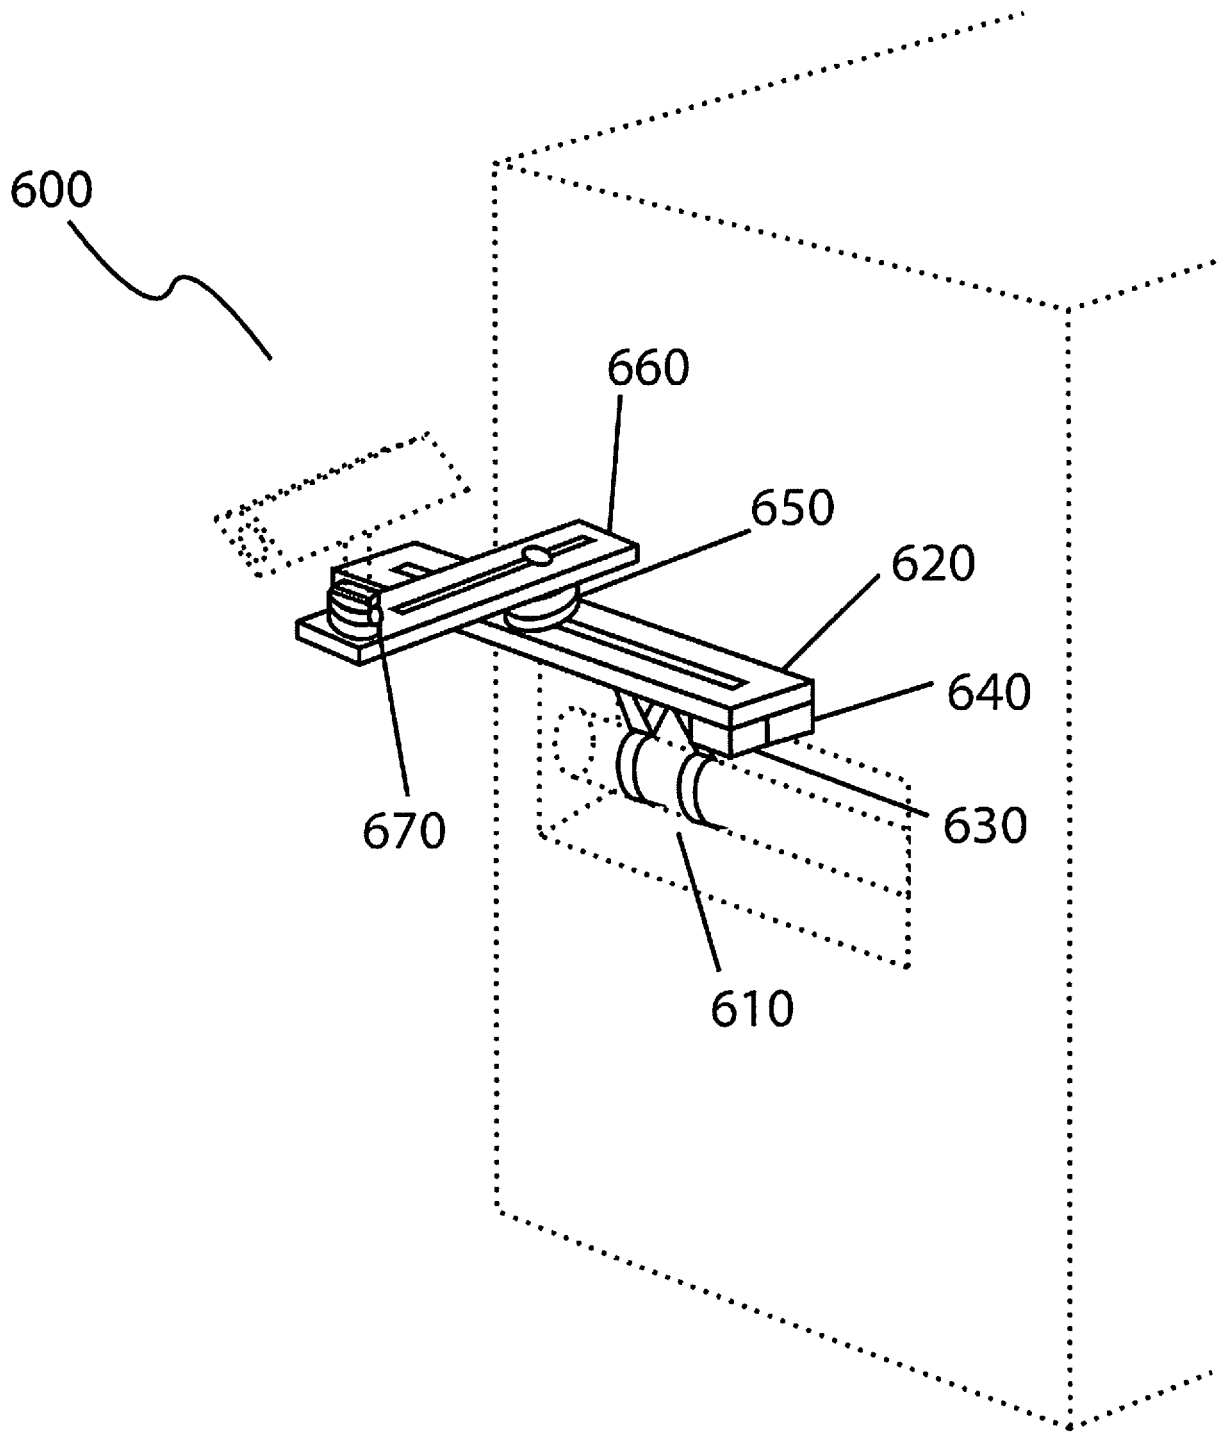


**FIG. 6**

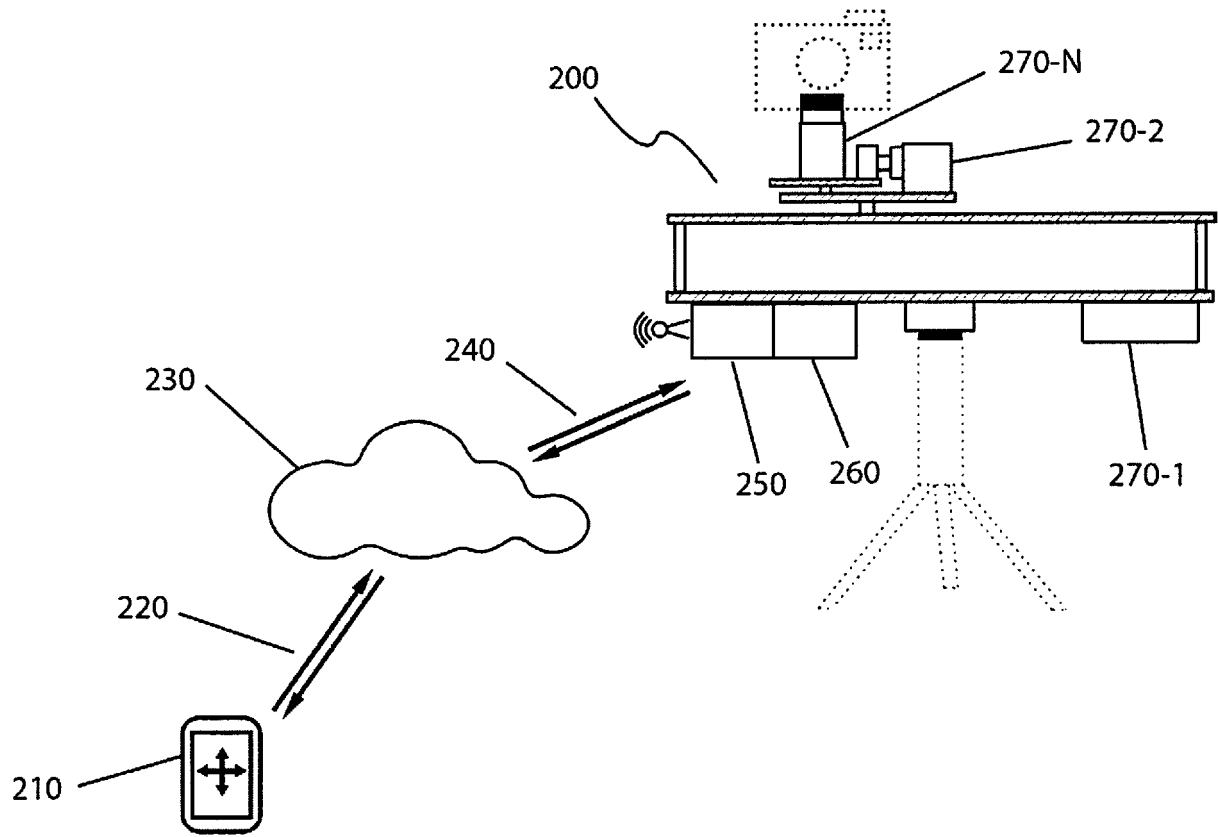

**FIG. 7**



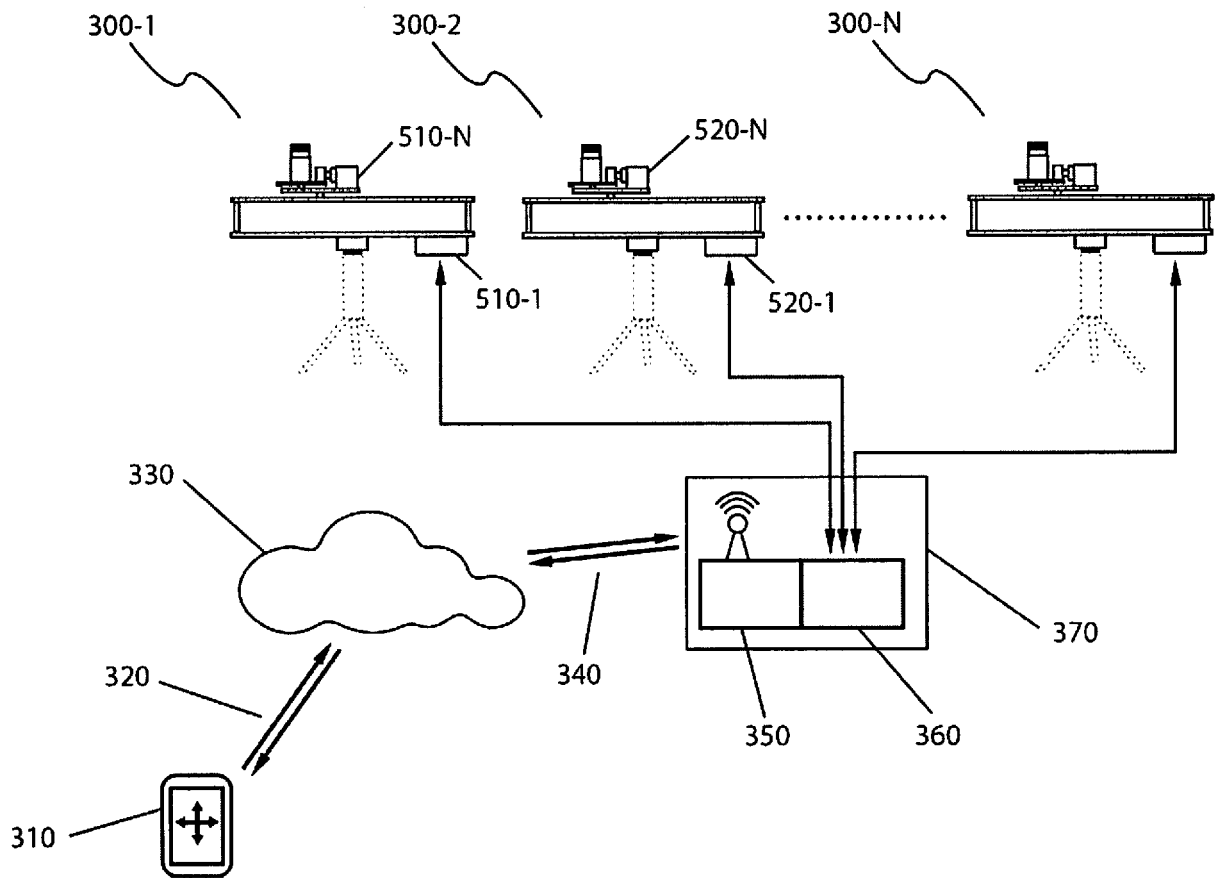

**FIG. 8**

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US2015/037585

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(8) - H04R 1/08 (2015.01)

CPC - H04R 1/08 (2015.07)

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - F16M 11/00, 11/04, 11/20, 11/24, 11/26, 11/28, 11/35; H04R 1/00, 1/08 (2015.01)

USPC - 211/1.51, 1.57; 248/121; 312/21; 318/466; 381/58, 150, 355, 361, 362, 363, 366, 368; 901/2, 14, 19

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - F16M 11/00, 11/04, 11/20, 11/24, 11/26, 11/28, 11/35; H04R 1/00, 1/08 (2015.07) (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Scholar, Google, YouTube.

Search terms used: microphone, stand, robot, servo, motor, belt, position, actuator, platform, surface, coordinate, slide, translate, pivot, rotate, laser, arm, align

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/0201807 A1 (MCPHERSON) 12 August 2010 (12.08.2010) entire document	1, 2, 4, 6-9, 11-16, 18-20
Y		3, 5, 10, 17
Y	US 2008/0041183 A1 (TODOROV) 21 February 2008 (21.02.2008) entire document	3
Y	US 5,611,508 A (PALMERO) 18 March 1997 (18.03.1997) entire document	5, 17
Y	US 2005/0156122 A1 (RADAHL) 21 July 2005 (21.07.2005) entire document	10

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 August 2015

Date of mailing of the international search report

14 SEP 2015

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774